



GOT190

Wall mounted LED or CFL up and down lit fitting

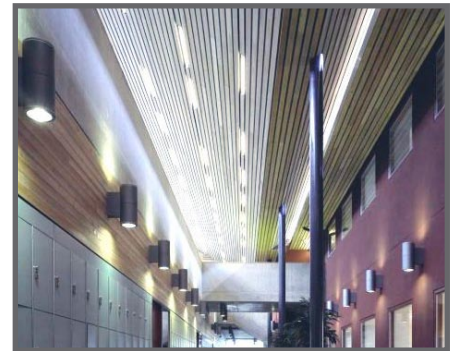

Installation view

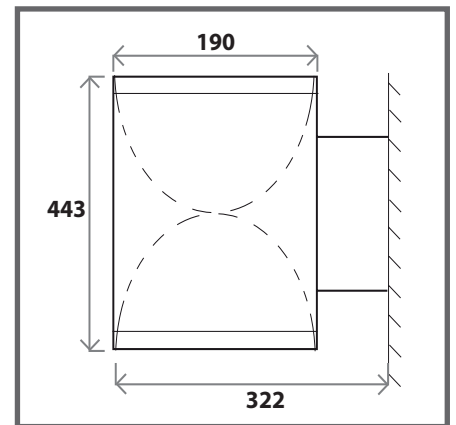

Dimensions (mm)

SPECIFICATION

OUTPUT OPTIONS

TYPE	Lumens	Total Load (cW)	Luminaire Efficacy (lm/cW)
2 x 42W TCD-E	3200 Down 3200 Up	89.5	47.6
2 x Tridonic LED	4100 Down 1300 Up	63.5	65.0

LIFE: Up to 50,000 hrs

EFFICACY: Up to 65 lm/cW

REFLECTORS: Two sandblasted reflectors which provide optimum clarity

INGRESS PROTECTION: IP65, suitable for interior and sheltered exterior applications (contact for more detail)

EMERGENCY: Integral 3 hour emergency

COLOUR: Any RAL colour subject to minimum quantity