



## HS/ASY

Exterior balustrade, anti-vandal, IP65 fitting with LED or CFL source.

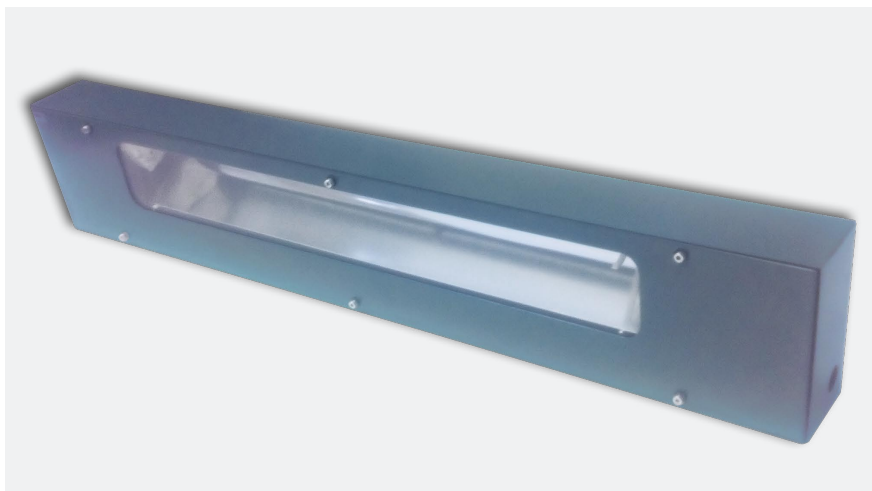

Installation view

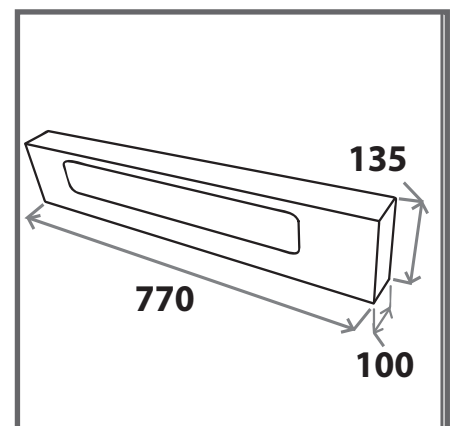

Dimensions (mm)

## SPECIFICATION

### OUTPUT OPTIONS

TYPE	Lumens	Total Load (cW)	Luminaire Efficacy (lm/cW)
1 x 55W PL	4800	60	58.4
1 x Philips LED	3805	33	91.0

LIFE:	Up to 50,000 hrs
EFFICACY:	Up to 91 lm/cW
REFLECTORS:	Asymmetric reflector to maximise output and limit light pollution
INGRESS PROTECTION:	IP65, suitable for interior and sheltered exterior applications (contact for more detail)
EMERGENCY:	Integral 3 hour emergency
COLOUR:	Any RAL colour subject to minimum quantity