






**LUMITRON**  
the art of performance lighting

Lumitron Lighting  
Unit 31 The Metro Centre  
Tolpits Lane  
Watford WD18 9UD

t.01923 226222  
f.01923 211300  
sales@lumitron.co.uk

**Luminaire Data Sheet**  
**RZ430/365**

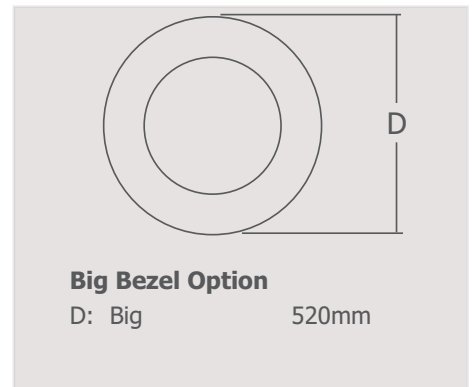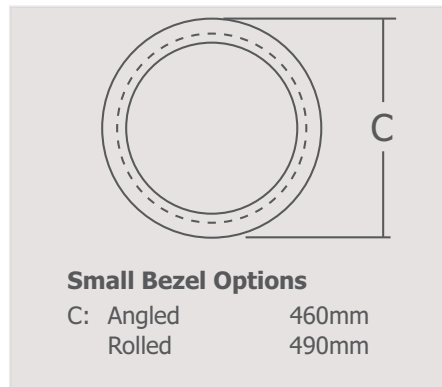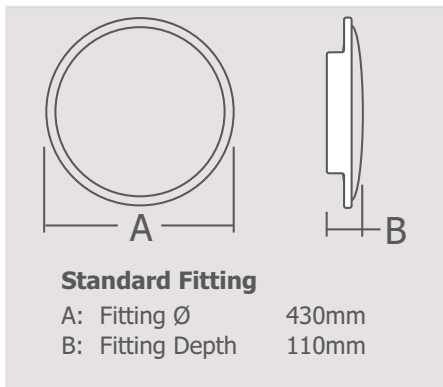

**Technical Specification**

Surface mounted luminaire with 3 LED boards




<b>LIFE</b>	50,000 hrs (L70)
<b>OUTPUT</b>	1950 lumens
<b>TOTAL CIRCUIT WATTS</b>	16.5 cW
<b>LED BOARD</b>	3 x Philips Fortimo LED line
<b>EFFICACY</b>	98.1 llm/cW
<b>LOR</b>	83%
<b>EMERGENCY OUTPUT</b>	370 lumens
<b>ELECTRONIC DRIVER</b>	HF (Fixed output) or HFDAL (DALI dimmable) available
<b>HEAT MANAGEMENT</b>	Striated anodised aluminium heat sink to optimise operating temperature, output and life.



**LUMITRON**  
the art of performance lighting

Lumitron Lighting  
Unit 31 The Metro Centre  
Tolpits Lane  
Watford WD18 9UD  
t.01923 226222  
f.01923 211300  
sales@lumitron.co.uk

**Luminaire Data Sheet  
RZ430/465**

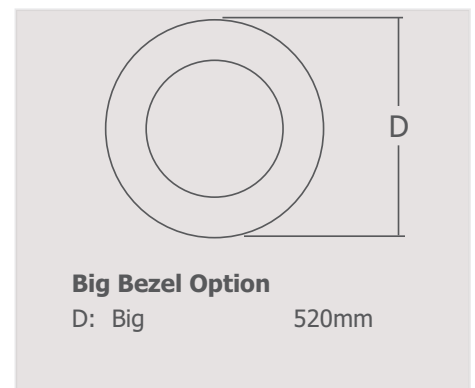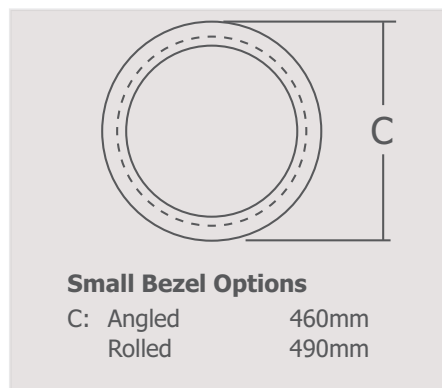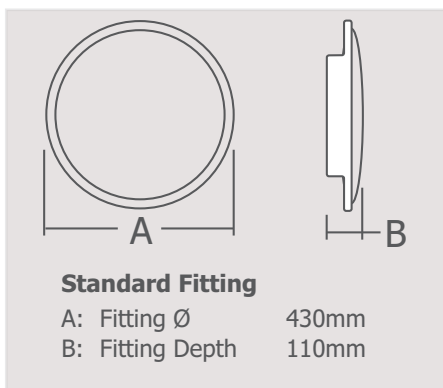

**Technical Specification**

Surface mounted luminaire with 4 LED boards

<b>LIFE</b>	50,000 hrs (L70)
<b>OUTPUT</b>	2600 lumens
<b>TOTAL CIRCUIT WATTS</b>	22.0 cW
<b>LED BOARD</b>	4 x Philips Fortimo LED line
<b>EFFICACY</b>	98.1 llm/cW
<b>LOR</b>	83%
<b>EMERGENCY OUTPUT</b>	370 lumens
<b>ELECTRONIC DRIVER</b>	HF (Fixed output) or HFDAL (DALI dimmable) available
<b>HEAT MANAGEMENT</b>	Striated anodised aluminium heat sink to optimise operating temperature, output and life.

## Accessory Options



SI Diffuser With White Body  
(*Supplied as standard*)



Angled White Bezel  
(/AW)



Angled Chrome Bezel  
(/AC)



Rolled White  
(/RW)



Rolled Bezel With Special  
Order Metallic Silver Bezel  
(/9006)



RZ With High LOR PK  
Controller  
(/PK)



Big White Bezel  
(/BW)



Big Chrome Bezel  
(/BC)